

SOT-89 Plastic-Encapsulate Transistors


Features

- High current (max. 1 A).
- Low voltage (max. 80 V).

MECHANICAL DATA

- Case style:SOT-89molded plastic
- Mounting position:any

SOT-89

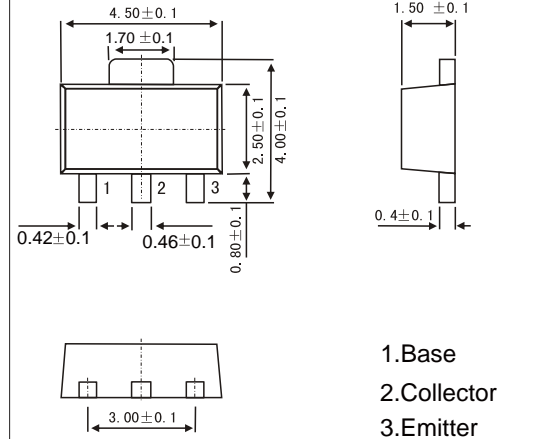

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Parameter	Symbol	Rating	Unit
Collector-base voltage	BCX54 BCX55 BCX56	V <sub>CB0</sub> 45 60 100	V
Collector-emitter voltage	BCX54 BCX55 BCX56	V <sub>CEO</sub> 45 60 80	V
Emitter-base voltage	V <sub>EBO</sub>	5	V
Collector current	I <sub>C</sub>	1	A
Peak collector current	I <sub>CM</sub>	1.5	A
Peak base current	I <sub>BM</sub>	0.2	A
Total power dissipation	P <sub>tot</sub>	1.3	W
Storage temperature	T <sub>stg</sub>	-65 to +150	°C
Junction temperature	T <sub>j</sub>	150	°C
Operating ambient temperature	T <sub>amb</sub>	-65 to +150	°C
Thermal resistance from junction to ambient	R <sub>th(j-a)</sub>	94	K/W
Thermal resistance from junction to solder point	R <sub>th(j-s)</sub>	14	K/W

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = 30 V, I <sub>E</sub> = 0			100	nA
		V <sub>CB</sub> = 30 V, I <sub>E</sub> = 0; T <sub>j</sub> = 125°C			10	uA
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = 5 V, I <sub>C</sub> = 0			100	nA
DC current gain	h <sub>FE</sub>	I <sub>C</sub> = 5 mA; V <sub>CE</sub> = 2 V	63			
		I <sub>C</sub> = 150 mA; V <sub>CE</sub> = 2 V	63		250	
		I <sub>C</sub> = 500 mA; V <sub>CE</sub> = 2 V	40			
DC current gain BCX54-10,BCX55-10,BCX56-10 BCX54-16,BCX55-16,BCX56-16	h <sub>FE</sub>	I <sub>C</sub> = 150 mA; V <sub>CE</sub> = 2 V	63		160	
		I <sub>C</sub> = 150 mA; V <sub>CE</sub> = 2 V	100		250	
Collector-emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 500 mA; I <sub>B</sub> = 50 mA			0.5	V
Base to emitter voltage	V <sub>BE</sub>	I <sub>C</sub> = 500 mA; V <sub>CE</sub> = 2 V			1	V
Transition frequency	f <sub>T</sub>	I <sub>C</sub> = 10 mA; V <sub>CE</sub> = 5 V; f = 100 MHz		130		MHz
DC current gain ratio of the complementary pairs	$\frac{h_{FE}}{h_{FE}}$	I <sub>C</sub>   = 150 mA;   V <sub>CE</sub>   = 2V		1.3	1.6	

# RATINGS AND CHARACTERISTIC CURVES

## ■ hFE Classification

TYPE	BCX54	BCX54-10	BCX54-16
Marking	BA	BC	BD

TYPE	BCX55	BCX55-10	BCX55-16
Marking	BE	BG	BM

TYPE	BCX56	BCX56-10	BCX56-16
Marking	BH	BK	BL

## ■ Typical Characteristics

