


## TO-92 Plastic-Encapsulate Transistors

### FEATURES

- High Breakdown Voltage
- TRANSISTOR (NPN)

### MECHANICAL DATA

- Case style: TO-92 molded plastic
- Mounting position: any

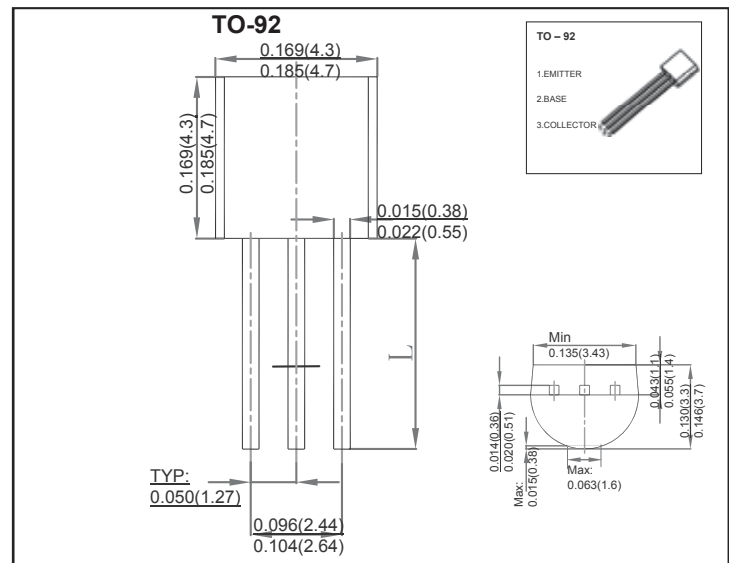

### MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	400	V
$V_{CEO}$	Collector-Emitter Voltage	400	V
$V_{EBO}$	Emitter-Base Voltage	6	V
$I_C$	Collector Current -Continuous	0.3	A
$P$	Collector Power Dissipation	625	mW
$\theta_{JA}$	Thermal Resistance from Junction to Ambient	200	°C /W
$T_J$	Junction Temperature	150	°C
$T_{STG}$	Storage Temperature	-55~+150	°C

### ELECTRICAL CHARACTERISTICS $T_a = 25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C = 0.1\text{mA}, I_E = 0$	400			V
Collector-emitter breakdown voltage	$V_{(BR)CEO}^*$	$I_C = 1\text{mA}, I_B = 0$	400			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E = 0.1\text{mA}, I_C = 0$	6			V
Collector cut-off current	$I_{CBO}$	$V_{CB} = 400\text{V}, I_E = 0$			0.1	$\mu\text{A}$
Emitter cut-off current	$I_{EBO}$	$V_{EB} = 4\text{V}, I_C = 0$			0.1	$\mu\text{A}$
DC current gain	$h_{FE(1)}^*$	$V_{CE} = 10\text{V}, I_C = 1\text{mA}$	40			
	$h_{FE(2)}^*$	$V_{CE} = 10\text{V}, I_C = 10\text{mA}$	50		200	
	$h_{FE(3)}^*$	$V_{CE} = 10\text{V}, I_C = 50\text{mA}$	45			
	$h_{FE(4)}^*$	$V_{CE} = 10\text{V}, I_C = 100\text{mA}$	40			
Collector-emitter saturation voltage	$V_{CE(sat)(1)}^*$	$I_C = 1\text{mA}, I_B = 0.1\text{mA}$			0.4	V
	$V_{CE(sat)(2)}^*$	$I_C = 10\text{mA}, I_B = 1\text{mA}$			0.5	
	$V_{CE(sat)(3)}^*$	$I_C = 50\text{mA}, I_B = 5\text{mA}$			0.75	
Base-emitter saturation voltage	$V_{BE(sat)}^*$	$I_C = 10\text{mA}, I_B = 1\text{mA}$			0.75	V
Collector output capacitance	$C_{ob}$	$V_{CB} = 20\text{V}, I_E = 0, f = 1\text{MHz}$			7	pF
Emitter input capacitance	$C_{ib}$	$V_{EB} = 0.5\text{V}, I_C = 0, f = 1\text{MHz}$			130	pF

\*Pulse test: pulse width  $\leq 300\mu\text{s}$ , duty cycles  $\leq 2.0\%$ .