

SOD-923 SCHOTTKY BARRIER DIODE


VOLTAGE RANGE: 30V

Features

- V_R 30V
- I_O 100mA
- Low Forward Voltage Drop

MECHANICAL DATA

- Case: SOD-923 Small Outline Plastic Package
- Polarity: Color band denotes cathode end
- Mounting Position: Any

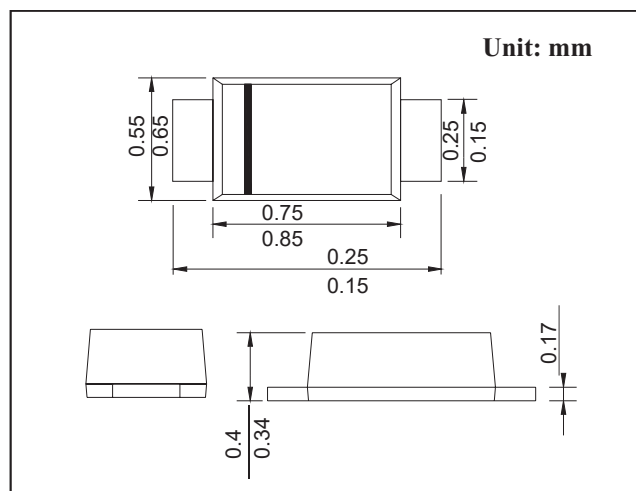

MAXIMUM RATINGS AND CHARACTERISTICS

@ 25°C Ambient Temperature (unless otherwise noted)

Item	Symbol	Unit	Conditions	Limit
Repetitive Peak Reverse Voltage	V_{RRM}	V		30
Reverse Voltage	V_R	V		30
Continue Forward Current	I_O	mA		100
Non-Repetitive Peak Forward Current	I_{FSM}	mA	8.3 ms single half sine-wave	500
Junction Temperature	T_J	°C		125
Storage Temperature	T_{STG}	°C		-55 to +125

Electrical Specification ($T_A=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Unit	Conditions	Min	Max
Forward Voltage	V_F	V	$I_F=10\text{mA}$		0.35
			$I_F=100\text{mA}$		0.55
Breakdown Voltage	V_R	V	$I_R=100\mu\text{A}$	30	
Reverse Current	I_R	μA	$V_R=10\text{V}$		10
			$V_R=30\text{V}$		50

Device	Package	Shipping
RB521M9-30	SOD-923	8000/Tape&Reel